


N=Number of contacts

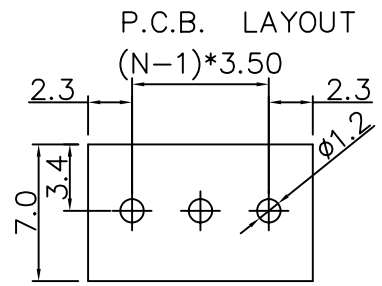

SPECIFICATIONS

- Contact(metal housing): Brass (CuZn)
- Terminal screw: Steel galvanized and chromitize
or Nickel plated or Tin plted(standard)(optian)
- Wire guard: Stainless steel
- Surface of solder tail: tin plated
- Insulator body(housing): Polyamide(Glass filled)(UL94V-0)
- Voltage rating: 125VAC
- Current rating: 10 Amps/way max
- Contact resistance: 20 Milliohms Max
- Insulation resistance: 5000 Megohms/1000V
- Withsanding Voltage: 1500VAC(lmim) Test time=60sec/1pcs
- Wire range: 16-26AWG
- Torque: 1.5kg-cm/M2
- Operating temperature: -33°C to +120°C
- Soldering ability: 95% Coverage Min
Test temperature= 230°C±10°C
Test time= 4 Sec±0.5 Sec
- Soldring reliability:
Test temperature= 250°C±10°C
5 seconds max

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.10 ANG. ±1°
10685		MEI		
		CHECKED BY		
		BECKY		
		DRAWING BY		
		HZF		
SCALE	NONE	REV.	A0	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△A0	A0	NEW RELEASE	MEI	