

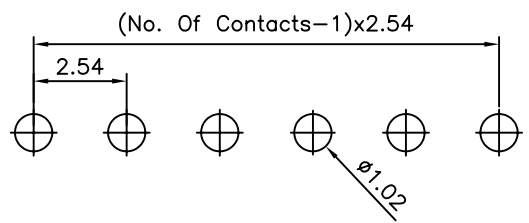
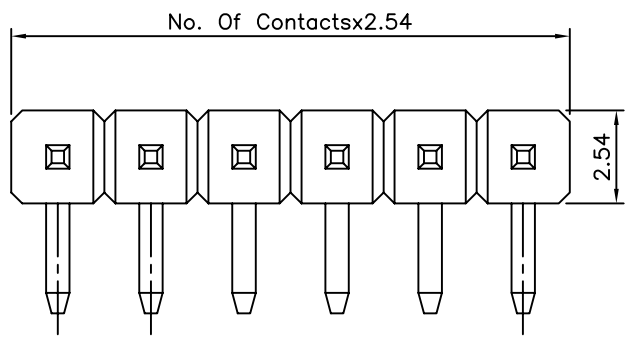


**SPECIFICATIONS**

Current: 3A  
 Operating Temperature: -55°C To +105°C  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Withstanding Voltage: AC 1000V RMS  
 Housing: Thermoplastic UL94V-0  
 Contact: Copper Alloys

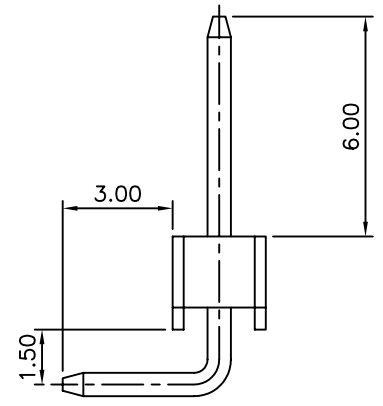

Recommended P.C.B Layout

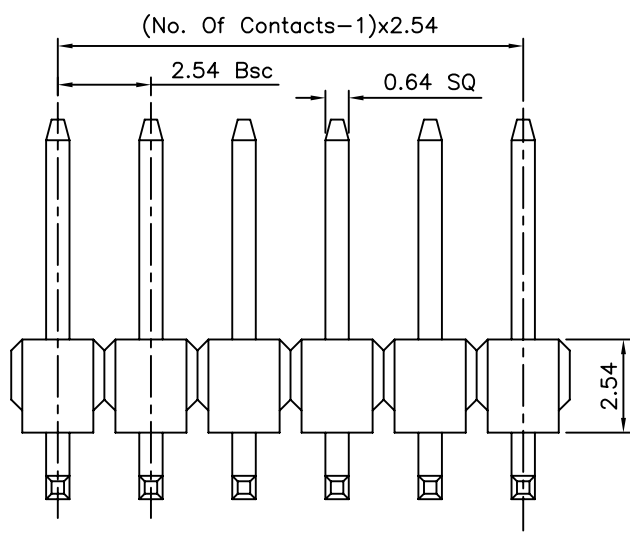

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG ±5°
00872		MEI		
		SHIN		
		DRAWING BY		
		HZF		
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	SHIN	03/06/2006