
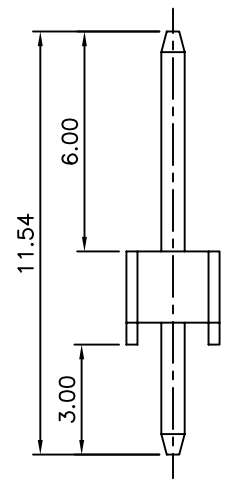
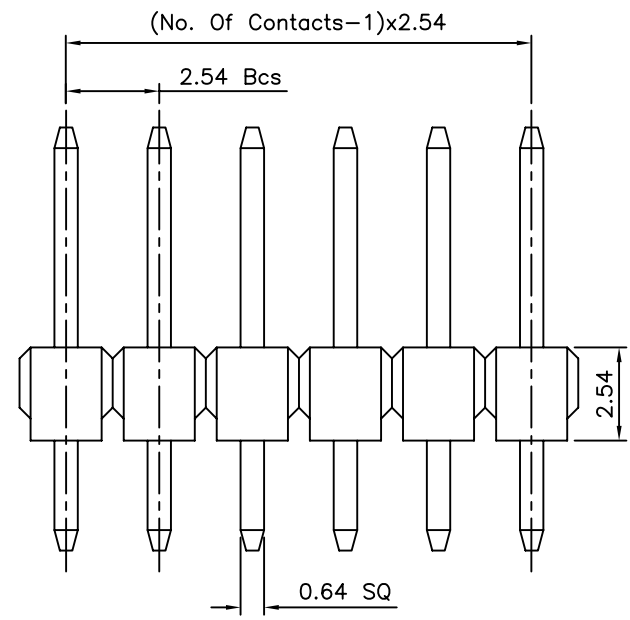
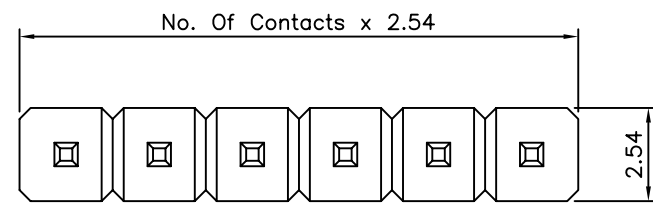


△ SPECIFICATIONS

Current: 3A  
 Operating Temperature: -55°C To +105°C  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Withstanding Voltage: AC 1000V RMS  
 Housing: PBT 30%GF, UL94V-0  
 Contact: Copper Alloys, Gold Flash  
 Color: Black

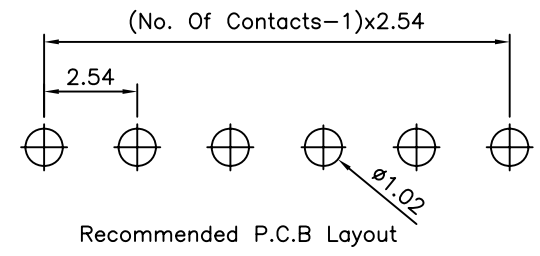

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG ±5°
00812		MEI		
		SHIN		
		HZF		
SCALE	NONE	REV.	A1	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify SPECIFICATION	SHIN	04/26/2007
△ A0		NEW RELEASE	SHIN	03/06/2006